

# Suregrip RF

The Suregrip is a midrange but vastly customisable remote control from FSL's Ultrabeam® Platform with up to 12 heavy duty buttons.

The Ultrabeam® Radio systems have become the industry standard proven to be among the most durable remote controls ever produced with many units operating in the harshest environments for over 15 years without fail.



## Technical Specification:

- Ergonomically designed with high impact ABS plastic
- Up to 12 buttons / functions with Push button control
- Customisable buttons labels
- Equipped with a LED indicator
- 433 MHz multichannel radio frequency  
(868 / 915 MHz available on request)
- Infrared frequency available for line of sight operation
- Protection rating: IP54
- PP3 standard or rechargeable battery
- Operating & Storage temperature: -10°C to +50°C
- Dimensions: 200 x 88 x 40 mm
- Weight: 300g (approx)

## Customisation options

- All stop button
- 2 handed control
- Button combinations
- Tilt / Accelerometer
- External antenna
- Built in charger to allow operation whilst in use

## Accessories

- Carry pouch with neck strap
- Battery charger
- 12v/24v/mains  
or vehicle charger

**FSL Electronics Ltd**


Sandholes Road, Cookstown, Co. Tyrone, BT80 9AR

+44 (0)28 867 66131 | [info@fslelectronics.com](mailto:info@fslelectronics.com)

[www.fslelectronics.com](http://www.fslelectronics.com)



# Receiver Options

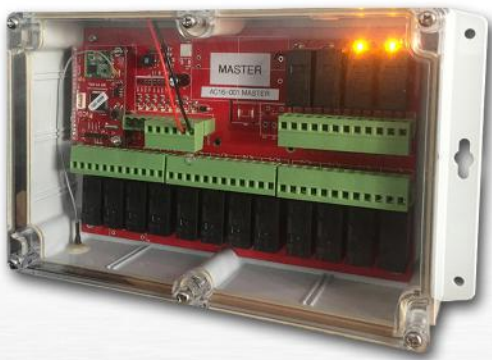

## AC16

- Outputs: 16 x 10A relays
- Inputs: 8 x 12/24V DC inputs
- Reception: FM Radio
- Radio frequency: 433 MHz multi channel (868 / 915 options available)
- Protection rating: IP65
- Power supply: 12/24 VDC, 90-264V AC
- Operating & storage temperature: -10°C to +50°C
- Customisation: LED's for status feedback
- Accessories: Mains switch mode PSU, External antenna



## DC26

- Outputs: 16 x 6A relays, 8 x 10A relays
- Inputs: 8 x 12/24V DC inputs
- Reception: FM Radio
- Radio frequency: 433 MHz multi channel (868 / 915 options available)
- Protection rating: IP65
- Power supply: 12/24 VDC
- Operating & storage temperature: -10°C to +50°C
- Customisation: OLED display for status, LED's for status feedback
- Accessories: External antenna



## TGW12

- Outputs: 1 x 10A relay, 10 x 5A relays, All stop relays
- Reception: FM Radio
- Radio frequency: 433 MHz multi channel (868 / 915 options available)
- Protection rating: IP65
- Power supply: 12-28V DC supply
- Operating & storage temperature: -10°C to +50°C
- Customisation: OLED display for status, LED's for status feedback, CanBus, RS232
- Accessories: External antenna



**FSL Electronics Ltd**

Sandholes Road, Cookstown, Co. Tyrone, BT80 9AR

+44 (0)28 867 66131 | [info@fslelectronics.com](mailto:info@fslelectronics.com)

[www.fslelectronics.com](http://www.fslelectronics.com)